



05

Honeycomb Blinds

Specialist in blinds

Product Features

Imitating the design of a honeycomb, it has the functions of heat preservation, UV protection, and sound insulation. A variety of categories including horizontal blinds, day and night double blinds, and skylight options are available. It is a great choice for creating a comfortable and private space.

Product Categories



Cordless



Top Down Bottom Up



Day and Night



Skylight

Control Systems



Continuous Loop



Cordless



Motorized



Cord Locked

Fabric Shading Effect



26mm/45mm Sheer



26mm Light Filtering



26mm Black Out



38mm Dual Cell
Light Filtering



38mm Dual Cell
Black Out



45mm Black Out

Available Rail Colors



Size:26mm



Size:38mm



Size:45mm



26mm No Drill Blinds

Color Swatches

26mm Light Filtering



☀️ 93020A



☀️ 93020B



☀️ 93020C



☀️ 93020D



☀️ 93020E



☀️ 93020F



☀️ 93020G



☀️ 93020H



☀️ 93020J



☀️ 93020K

26mm Blackout



☀️ 93021A



☀️ 93021B




☀️ 93021C




☀️ 93021D



☀️ 93021J

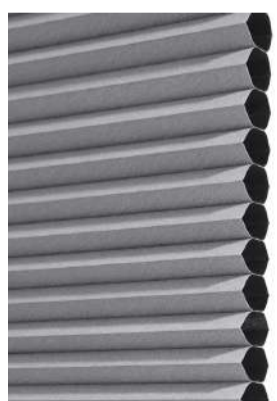

☀️ 93021E

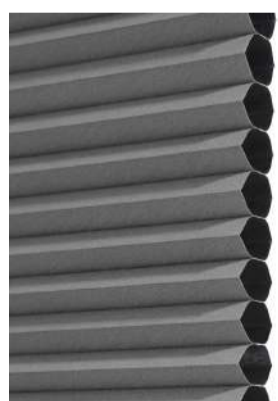

☀️ 93021F



☀️ 93021G



☀️ 93021H



☀️ 93021I


38mm Light Filtering & Blackout



☀️ 93022A




☀️ 93022B




☀️ 93022C



☀️ 93022D

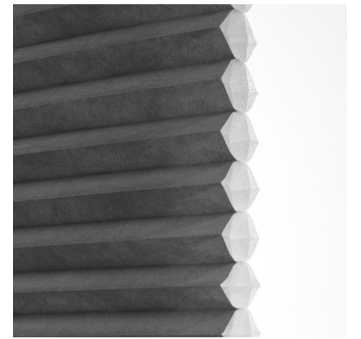


☀️ 93022E



☀️ 93023A




☀️ 93023B



☀️ 93023C



☀️ 93023D

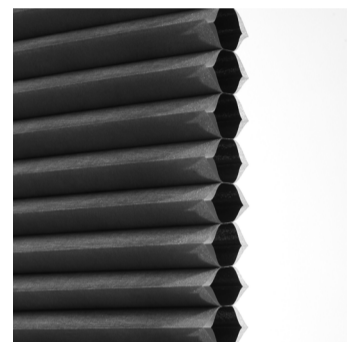


☀️ 93023E

45mm Light Filtering & Blackout



☀️ 93025A



☀️ 93025B



☀️ 93025C



☀️ 93025D



☀️ 93025E



☀️ 93024A



☀️ 93024B



☀️ 93024C




☀️ 93024D




☀️ 93024E

Parameters of Rail


26 mm

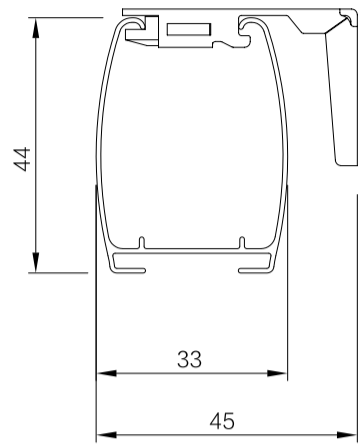

Cordless Headrail

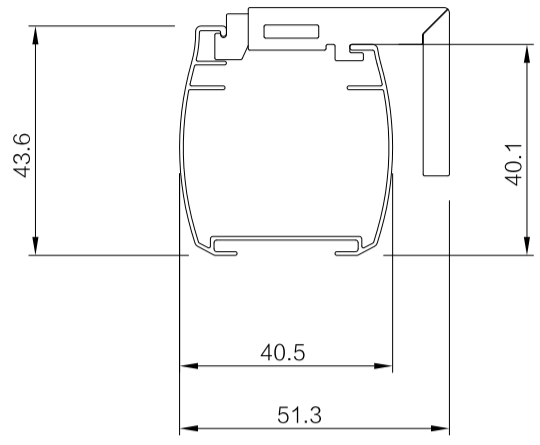


Continuous Loop/Bead Chain/Motorized Headrail

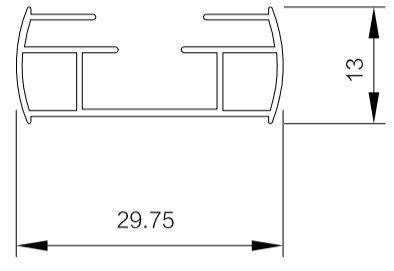


26mm Bottom Rail

38 mm

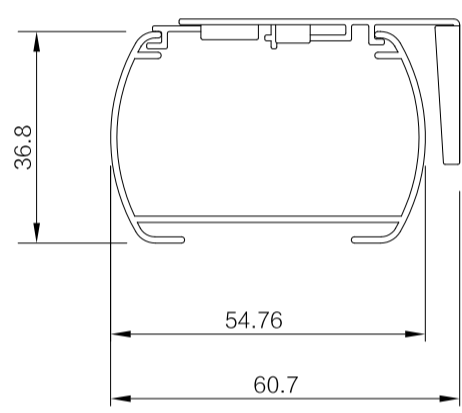


38mm Headrail

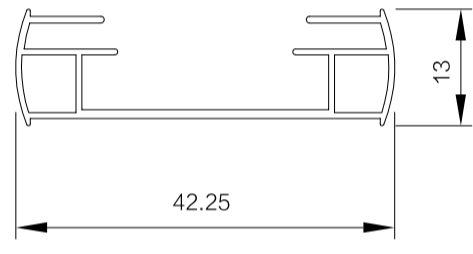


38mm Bottom Rail

45 mm

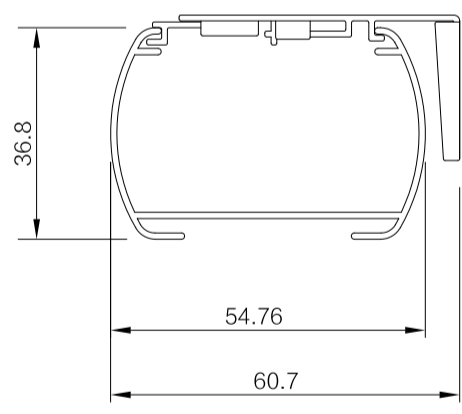


45mm Headrail

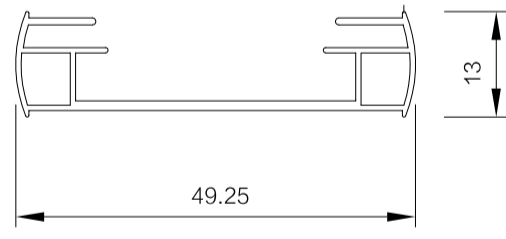


45mm Bottom Rail

Measurement and Installation


Inside Mount

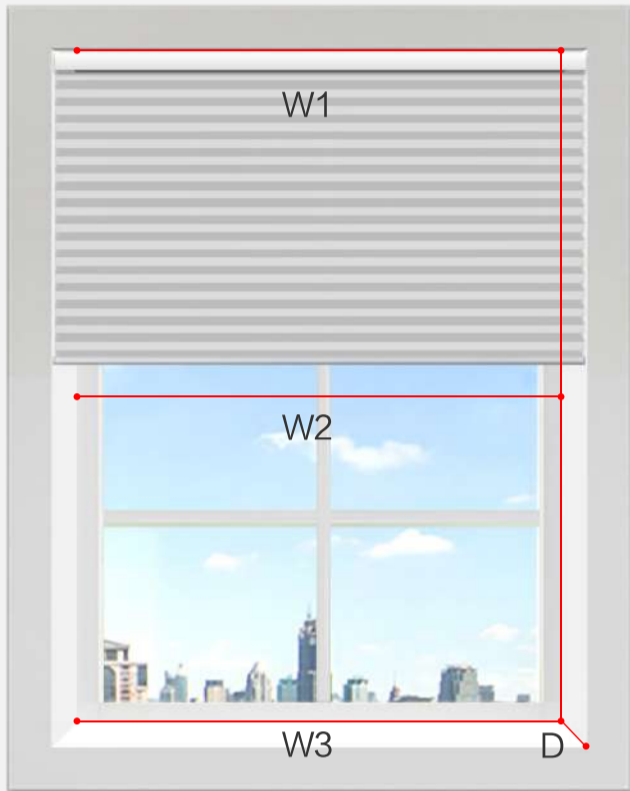


Measurement requirements :
 The depth(D)of the window hole should be more than 6cm.
 Width: Measue W1,W2,W3, select the shortest one as the Width
 Width of Blind=Width-1cm
 Height of Blind=Height

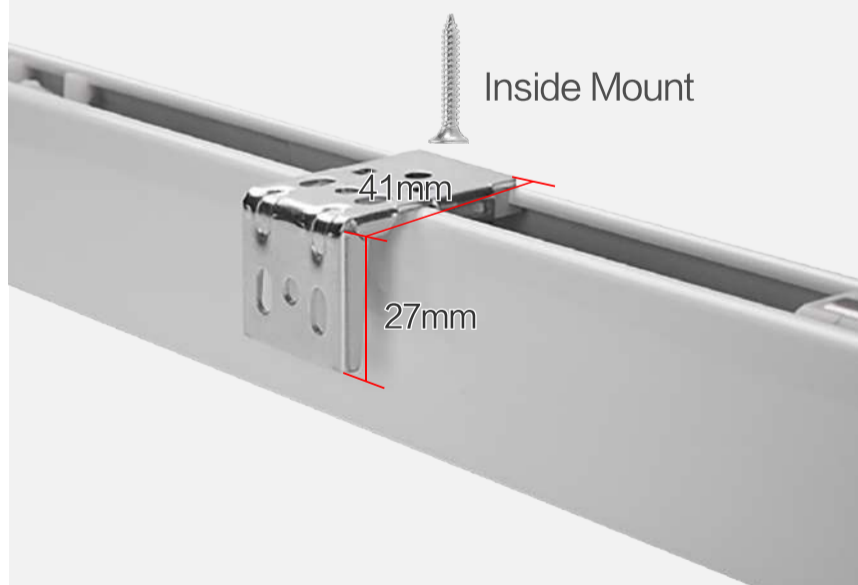

Outside Mount

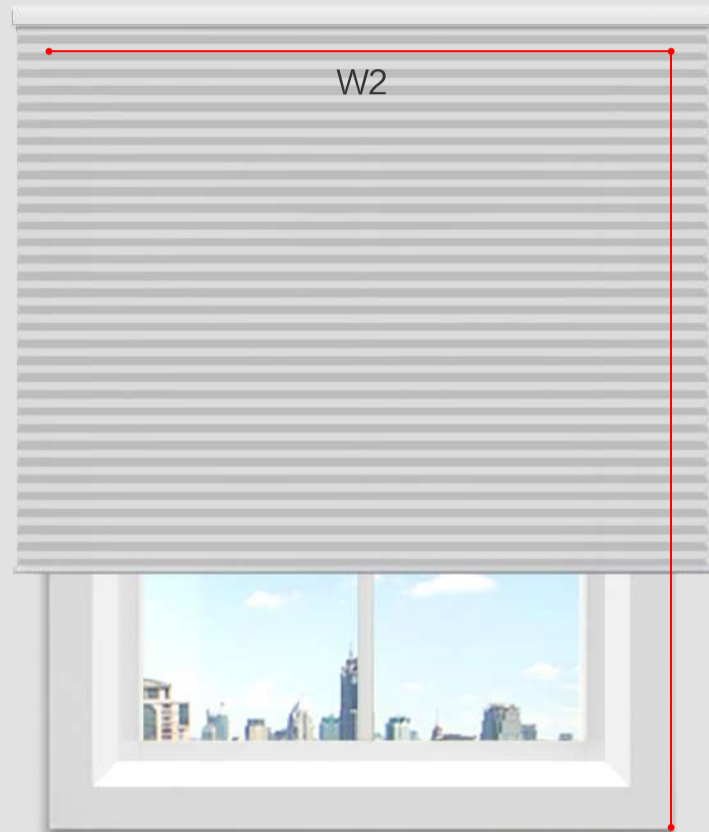

Window frames protruding the wall by more than 1cm will not be suitable for the outside mounting
 Width of Blind=Width+10cm
 Height of Blind=Height+15cm

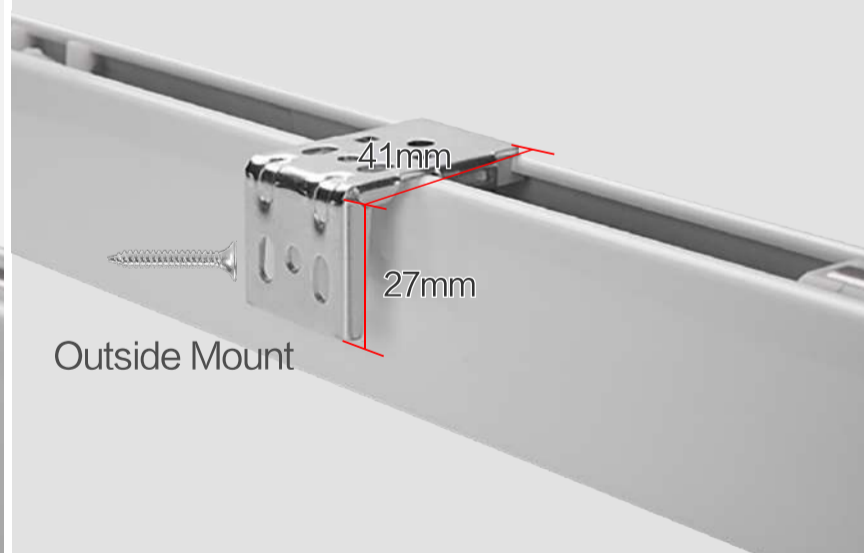

Customizable Size

Honeycomb Size Considerations 26mm						
Lift System		Width		Drop		Max Area
Cordless	Regular Cordless	300 mm	2500 mm	500 mm	2400 mm	
	TDBU Cordless	420 mm				
	Day&Night Cordless					
Corded	Bottom Up Coated	200 mm	3000 mm	200 mm	3800 mm	
	Day&Night Double Corded	350 mm				
	TDBU Double Corded					
Continuous Loop	Cord Loop	360 mm	3000 mm	500 mm	2800 mm	
	Day&Night Loop	590 mm			2600 mm	
	TDBU Loop				2600 mm	
Skylight	Manual	250 mm	1500 mm	200 mm	3500 mm	5.0 M2
Motorized	Cordless With AC Power	700 mm	2500 mm	300 mm	3500 mm	5.0 M2
	Cordless With DC Power					
	Day& Night With AC Power	900 mm	3000 mm	600 mm	2600 mm	
	Day& Night With DC Power					
	Skylight with With AC Power	420 mm	2000 mm	300 mm	3500 mm	
	Skylight Battery With DC Power	350 mm				
	TDBU	950 mm				
Remark: 1. If for Continuous loop of TDBU or Day & Night ,if width more than 2 meter,the drop need to more than half of Width 2.AC power is with power line,DC power is with recharged battery 3.Skylight just will use 26mm,there is no skylight system in 38mm 45mm						

Honeycomb Size Considerations 38mm 45mm

Lift System		Width		Drop		Max Area
Cordless	Regular Cordless	320 mm	3000 mm	300 mm	2400 mm	
	TDBU Cordless					
	Day&Night Cordless					
Cordded	Bottom Up Coaded	200 mm	3000 mm	200 mm	3800 mm	
	Day&Night Double Corded	300 mm		500 mm		
	TDBU Double Corded					
Continuous Loop	Cord Loop	360 mm	3000 mm	500 mm	2800 mm	
	Day&Night Loop	590 mm			2600 mm	
	TDBU Loop				2600 mm	
Motorized	Cordless With AC Power	700 mm	2500 mm	400 mm	3500 mm	5.0 M2
	Cordless With DC Power					
	Day& Night With AC Power	900 mm	3000 mm	2600 mm		
	Day& Night With DC Power					
	TDBU	950 mm				

Remark:

1. If for Continuous loop of TDBU or Day & Night ,if width more than 2 meter,the drop need to more than half of Width
- 2.AC power is with power line,DC power is with recharged battery